

8X19


Wire Rope with Polypropylene Core 8 Strands Seale



For high demands on elongation and corrosion protection with special rope lubrication



Rope Length is maintained due to the environmentally stable core. No lube throw-off keeps equipment clean

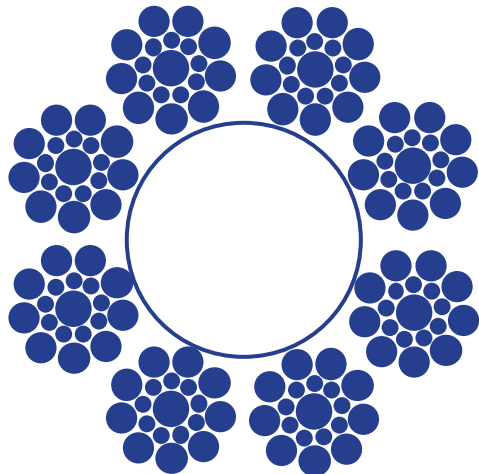

item number	rope ø		breaking load min.		weight		construction
	mm	in	kN	lbs	kg/100m	lb/ft	
61540	8.0	5/16	35,5	7981	20,97	0,1409	8x19S-SFC 1770 B sZ (RRL)
77513	9.5	3/8	50,3	11308	30,30	0,2036	8x19S-SFC 1770 B sZ (RRL)
10884	9.5	3/8	42,5	9558	30,30	0,2040	8x19S-SFC 1370/1770 U sZ (RRL)
73003	12.7	1/2	75,9	17064	53,96	0,3630	8x19S-SFC 1370/1770 U sZ (RRL)

Further nominal strengths and/or diameters (including imperial dimensions) on request. Rope diameter-tolerances according to EN12385-5/ISO 4344.